

PROJECT:	DATE:
PREPARED BY:	NOTES:

LINEAR HIGHBAY SPEC SHEET

Description


- * Input Voltage: 100-277/347VAC,50/60Hz
- * Input Watts: 24*16in.(100W/160W) 48*16in.(200W)
- * Efficacy: Min.140 LPW
- * Delivered Lumens: 100W@14000lumens/160W
@22400lumens/200W@28000lumens
- * CCT:4000K,5000K
- * CRI:>80 with SDCM<6
- * LED Type: SMD2835 with LM80 and L90
- * Power Factor:>0.9
- * Operating Temp.: -20°C to +55°C
- * Housing material: painted stamping steel
- * Mounting: hanging
- * Warranty:5-years
- * In-door(IP20)




Product Specifications

- * Input voltage: AC120-347V, suitable for majority countries.
- * External Driver, cUL approval, PF>0.9
- * Non-flickering, no glare
- * flush mounted, easy installation
- * Application: Warehouse, workshop, factory, train station, bus station
- * ETL&DLC Premium

Dimensions

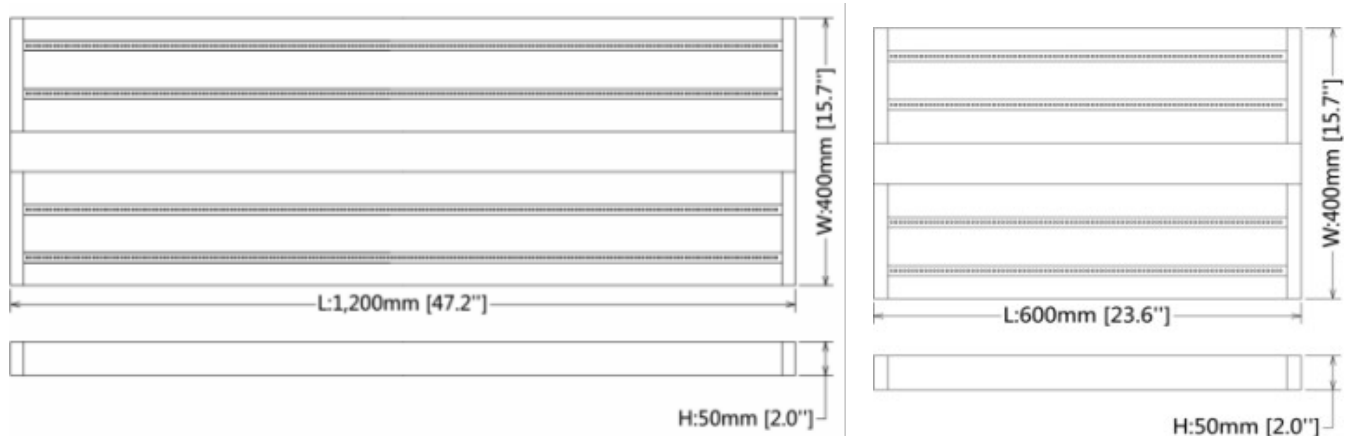

SPECIFICATIONS

MODEL	WL-LH2FT100DHV	WL-LH2FT160DHV	WL-LH1FT200DHV
			
PERFORMANCE SUMMARY			
Input Wattage	100W	160W	200W
Input Voltage	120-277/347V		
Delivered Lumens	14000lm	22400lm	28000lm
Efficacy	Min.140lm/W		
CRI	80min		
CCT	3500K,4000K,4500K,5000K		
Power Factor	> 0.9		
MAX THD	< 20%		
Operation Temp	-35°C+55°C		
LIGHTING CONTROL			
Dimming Capacity	0-10V dimming, 10% - 100%		
Photo Sensor	Optional		
DIMENSION & WEIGHT			
Product Height	50mm		50mm
Product Length	600mm		1200mm
Product Width	400mm		400mm
Product Weight	3.7KG	4.3KG	6.7KG
Packing Dimension	L88xW47xH8.5cm		L126.5xW47xH8.5cm
LONGEVITY & WARRANTY			
L80 Life	>50000hrs		
Warranty	5 Years		
LISTING & CERTIFICATE			
ETL/cETL			
DLC Premium			

CAUTION

- Risk of electric shock;

Ordering Information

Eg:WL-LH2FT100DHV-40K

FAMILY	SIZE	WATTAGE	CONTROLS	VOLTAGE	CCT	OPTIONS
LED Linear Highbay	2FT	100 100W	(blank) None	HV 120-277/347V	3500K	Diffuser
		160 160W	D 0-10V Dim		4000K	Cage
	4FT	200 200W			5000K	MS Motion Sensor