
PROJECT:	DATE:
PREPARED BY:	NOTES:

UFO High Bay SPECIFICATIONS

COMMON TECHNICAL DATA				
Efficacy	Up to 140 LPW			
LED Chip	LUMILEDS			
SDCM	<5			
Beam Angle	60°/90°/120° PC lens			
IP/IK Rated	IP65/IK08			
Warranty	50,000 hours / 5 years			
Controls	1-10V Dimming/Microwave/Zigbee system			
Product Certificate	ETL, DLC, SAA, CE, RoHS			
Installation	Hanging Hook			

Application: Warehouse, libraries, workshops, shopping malls, supermarkets, shops, restaurants, sports centers, cinemas, hospitals, clothing stores, bars and other indoor lighting places.


MECHANICAL CHARACTERISTICS (Unit: mm)

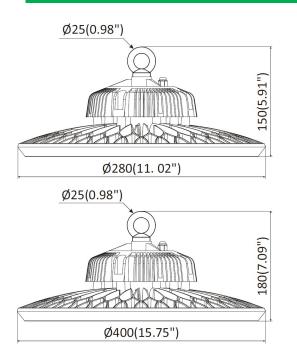





Ø25(0.98") (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.5°9) (1.

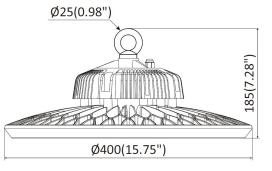



Hanginghook



Safety rope

Product Specifications

SKU	UFOH100A	UFOH150A	UFOH200A	UFOH240A
Watts	100W	150W	200W	240W
Model Number	ES-HB100D01	ES-HB150D01	ES-HB200D01	ES-HB240BH01
Efficacy	140 LPW	140 LPW	140 LPW	140 LPW
Power Factor	>0.97	>0.97	>0.97	>0.97
Input Voltage	100-277 VAC	100-277 VAC	100-277 VAC	100-277 VAC
ССТ	4000K/5000K/5700K	4000K/5000K/5700K	4000K/5000K/57 00K	4000K/5000K/57 00K
Color Rendering Index	Ra70	Ra70	Ra70	Ra70
LED Brand		UMILEDS	UMILEDS	UMILEDS
Housing Color	Black	Black	Black	Black
Housing Material	Aluminum, PC	Aluminum, PC	Aluminum, PC	Aluminum, PC
Working Environment	-30°C to +50°C 10% to 90% RH			
Lifespan	L80B10 50000 hrs	L80B10 50000 hrs	L80B10 50000 hrs	L80B10 50000 hrs
Luminous Flux	14,000 lm	21,000 lm	28,000 lm	33,600 lm

CAUTION


- Risk of electric shock;

- Use in dry locations only.

PACKAGE			
SKU	PCS/ CTN	Net Weight	Gross Weight
UFOH 100A	1	6.6 lb	7.7 lb
UFOH 150A	1	8.8 lb	11.0 lb
UFOH 200A	1	12.1 lb	14.3 lb
UFOH 240A	1	13.9 lb	16.5 lb

- All of the mechanical, electrical and light characteristics in this document are typical value.

Product Packing Image

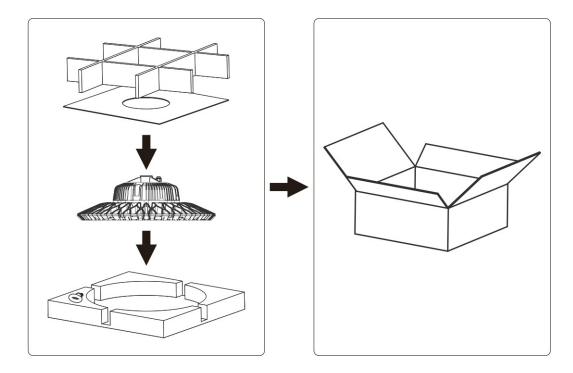

WARRANTY

This product has a warranty for a period of 5 years from the date of purchase. The warranty is invalid in the case of improper installation, tampering, or removal of the Q.C. date label. Installation in an improper working environment or installation not according to the current edition of the National Electric Code also invalidates the warranty. If this product fails during the warranty period, it will be replaced free of charge, subject to correct installation and return of the faulty unit. ALI does not take responsibility for any installation costs associated with the replacement of this product. This warranty is an addition to the statutory rights in the country of purchase. ALI reserves the right to alter specifications without prior notice.